




Design by Helena Chmelíková

PRECIOSA Candy™

111 01 363; 8 mm



PRECIOSA Rocailles

311 19 001; 10/0



*Preciosa Ornela introduces beads and seed beads
from the PRECIOSA Traditional Czech Beads™ brand.*

Preciosa-Ornela.com



DELICATE HEADBAND

Rose wreath

PRECIOSA

Rose wreath

Would you like to delight your friends?
Try making a headband out of PRECIOSA Rocailles and PRECIOSA Candy™ according to this tutorial.

Materials and tools:

PRECIOSA Candy™ (C)
111 01 363; 8 mm; 93180/22201-L1



PRECIOSA Rocailles (R)
311 19 001; 10/0; 93170



a wide oval headband; a 0.30 mm wire
(in the shade according of the used beads)

snipping pliers; flat nose pliers; a ruler



Difficulty: ●●●●●

Technique: wirework

Procedure:


Step 1:
Cut off about 2 m of wire.



Step 2:
Fold it in half. Thread 1x R. Shift it to the middle.





Step 3:
String a total of 30x C with 1x R between each one. Monitor the orientation of the front and back of the C. String 5x C with rocailles between them onto one half of the wire. Thread the second half of the wire. Add the missing R. Continue in the same way up to the end. This will create a narrow band which should be as straight as possible. Thread 1x R at the end of one half of the wire. Also thread the second half of the wire.

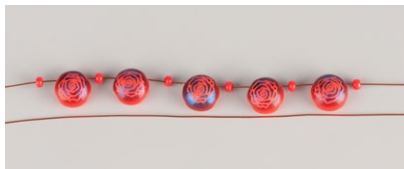

Step 4:
Place the band of beads next to the headband. Twist the free wires 1x around the headband under the end R.




Step 5:
Twist one wire diagonally at the rear of the headband and cross it between the C and across the R. Do this 5x.

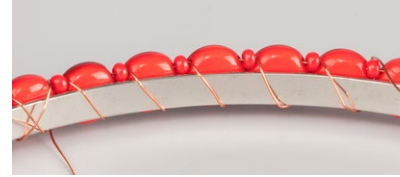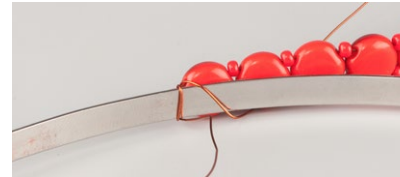

Step 6:
Press the band against the headband. Measure the distance of the band from the ends of the headband. Move the headband, if necessary.



Step 7:
Cross the second free wire across the first wire at the back of the headband and between the R.

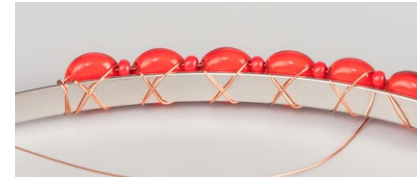

Step 8:
Now hold the band firmly. You can twist the first wire up to the end of the band. Cross the second wire over it.

Step 9:
Thread the wires through 1x R at the end of the band. Tighten.

Step 10:
Twist the wires 1x around the headband under the R.

Step 11:
Carefully thread the wires between the side of the headband and the twisted wires. Snip off. Squeeze the ends between the band and the headband.

